


# SH130

## Geared machine for elevators

The GEARED SH130 is a versatile geared machine designed for use in elevator systems and lifting equipment. It is available in multiple variants as well as custom configurations – tailored to various application requirements.

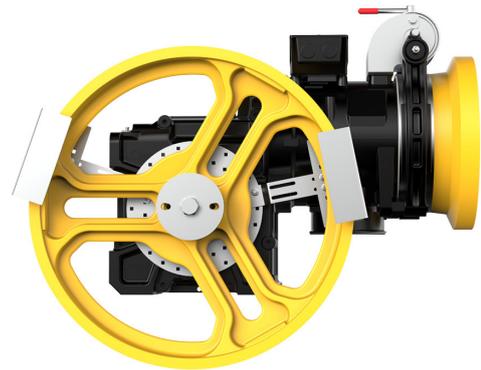

## Overview

With a load capacity of up to 550 kg, the SH130 is suitable for a wide range of passenger and freight applications.

Depending on the project, the drive can be individually adapted and configured.

## Machine versions

### SH130

<b>Maximum Static Load:</b>	2600 kg / 25.5 kN
<b>Maximum Capacity:</b>	550 kg
<b>Reduction Ratio:</b>	1/52; 1/45; 1/43; 1/37; 2/53; 2/43; 3/47
<b>Oil Capacity:</b>	3.7 l
<b>Power Range:</b>	50 Hz 2,7 ÷ 7,5 kW 60 Hz 4 ÷ 8,2 kW

### SH130SSB

<b>Maximum Static Load:</b>	2600 kg / 25.5 kN
<b>Maximum Capacity:</b>	550 kg
<b>Reduction Ratio:</b>	1/52; 1/45; 1/43; 1/37; 2/53; 2/43; 3/47
<b>Oil Capacity:</b>	3.7 l
<b>Power Range:</b>	50 Hz 2,7 ÷ 7,5 kW 60 Hz 4 ÷ 8,2 kW

### SH130G

<b>Maximum Static Load:</b>	2900 kg / 28.5 kN
<b>Maximum Capacity:</b>	630 kg
<b>Reduction Ratio:</b>	1/52; 1/43; 1/37
<b>Oil Capacity:</b>	3.7 l
<b>Power Range:</b>	50 Hz 5,5 ÷ 7,5 kW 60 Hz 6 ÷ 8,2 kW

### SH130G SSB

<b>Maximum Static Load:</b>	2900 kg / 28.5 kN
<b>Maximum Capacity:</b>	630 kg
<b>Reduction Ratio:</b>	1/52; 1/43; 1/37
<b>Oil Capacity:</b>	3.7 l
<b>Power Range:</b>	50 Hz 5,5 ÷ 7,5 kW 60 Hz 6 ÷ 8,2 kW